neo Dumps

Juniper

JN0-648 Exam

Juniper Enterprise Routing & Switching Certification

Questions & Answers

(Demo Version - Limited Content)

Thank you for Downloading JN0-648 exam PDF Demo

Get Full File:


https://neodumps.com/jn0-648/

WWW.NEODUMSP.COM

Version: 7.1

Question: 1

Exhibit.

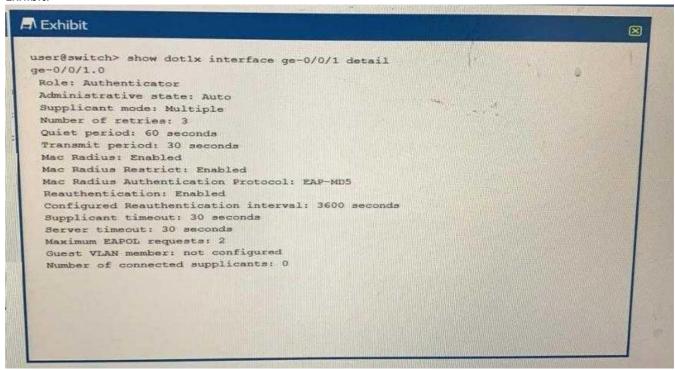

Which two statements are true about the 802. 1X output shown in the exhibit? (Choose two.)


- A. EAPoL traffic will not be sent out of the use ge-0/0/1 interface
- B. EAPoL traffic will be sent out of the ge-0/0/1 interface.
- C. The supplicant is authenticated using 802. 1X
- D. The supplicant is not authenticated using 802. 1X

Answer: BD

Explanation:

Question: 2

You receive the same 100.200.0/16 route from all four ISPs to which you are connected. Referring to the exhibit, which ISP's route will be selected as active?

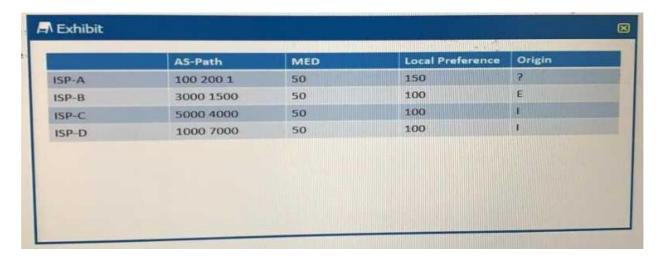

A. ISP-A

B. ISP-B

C. ISP-C

D. ISP-D

Answer: A

Explanation:

Question: 3

Click the Exhibit button.

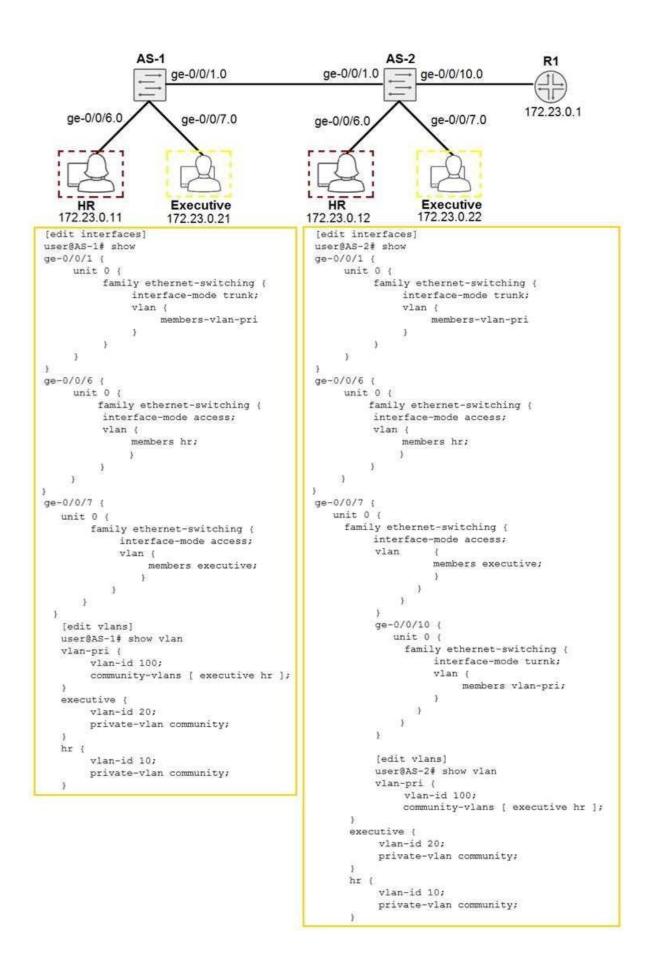



Exhibit.

You recently implemented the configuration shown in the exhibit. After committing these changes, the community devices connected to AS-1 are not able to communicate with the appropriate community devices connected to AS-2.

What must be done to allow these community devices to communicate?

- A. You must configure to allow the ge-0/0/1 interface on AS-1 as the inter-switch.
- B. You must configure the ge-0/0/10 interface on AS-1 as the inter-switch link.
- C. You must configure the ge-0/0/1 interface on both switches the inter-switch links.
- D. You must configure an isolation VLAN ID under the vlan-pri vlan on the AS-2 switch.
- D. You must configure an isolation VLAN ID under the vlan-pri VLAN on both switches.

	Answer: C
Explanation:	
https://www.juniper.net/documentation/en_US/junos/topics/topic-map/prexample-configuring-pvlans-with-secondary-vlan-trunk-ports-and-promiscutor on all the switches, configure a trunk interface as the Inter-Switch Link connect the switches to each other	uous-access-ports
Question: 4	
Packets enter a Juniper device and are classified as best effort. During the the classification of the packets is changed to expedited forwarding by a device is using the default CoS policies Which statement is true in this scenario?	
A. The packet is forwarded according to the new packet classification, and the to the new class.	ne DSCP bits are rewritten
B. The packet is forwarded according to the new packet classification, a change.	and the DSCP bits do not
C. The packet is forwarded according to the original packet classification, change.	and the DSCP bits do not
D. The packet is forwarded according to the original packet classification rewritten to the new class.	n, and the DSCP bits are
	Answer: B
Explanation:	
Question: 5	

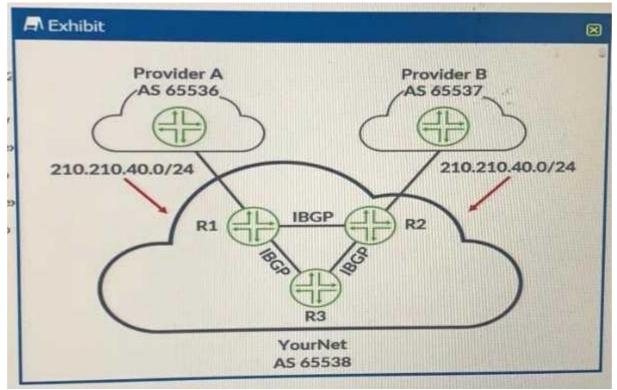

YourNet is learning the 210.210.40.0/24 route from Provider A and Provider B YourNet would like to forward traffic destined to the 210.210.40.0/24 networking using Provider B. Referring to the exhibit, how would you accomplish this task?

- A. Add the well-known no-export community to the routes learned through R2.
- B. Apply an export policy to R1's IBGP peers to set a higher local preference.
- C. Add the well-known no-export community to the routes learned through R1.
- D. Apply an export policy to R2's IBGP peers to set a Their local preference.

	Answer: D
Explanation:	

Thank You for trying JN0-648 PDF Demo

https://neodumps.com/jn0-648/

Start Your JN0-648 Preparation

[Limited Time Offer] Use Coupon "SAVE20" for extra 20% discount on the purchase of PDF file. Test your JN0-648 preparation with actual exam questions